



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
17.04.2002 Bulletin 2002/16

(51) Int Cl.7: **A61F 13/15**

(21) Application number: 01308772.1

(22) Date of filing: 15.10.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• Shimada, Takaaki, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)  
• Nakamura, Kenji, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(30) Priority: 13.10.2000 JP 2000314188

(74) Representative: Parry, Christopher Stephen  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD18 0JU (GB)


(71) Applicant: **UNI-CHARM CORPORATION**  
Kawanoe-shi Ehime-ken (JP)

(54) **Disposable pull-on undergarment**

(57) A disposable pull-on undergarment includes each of front and rear waist-encircling regions having a first elasticized zone E1 and a second elasticized zone E2 extending in a waist-encircling direction. Tensile stress of the first elasticized zone E1 is greater than that

of the second elasticized zone E2. The undergarment thus constituted can reduce an incidence of intense pressure locally exerted on a waist of a wearer of the undergarment and avoid an occasion whereby an excrement-absorbing function of a core is hindered.

**FIG.1**

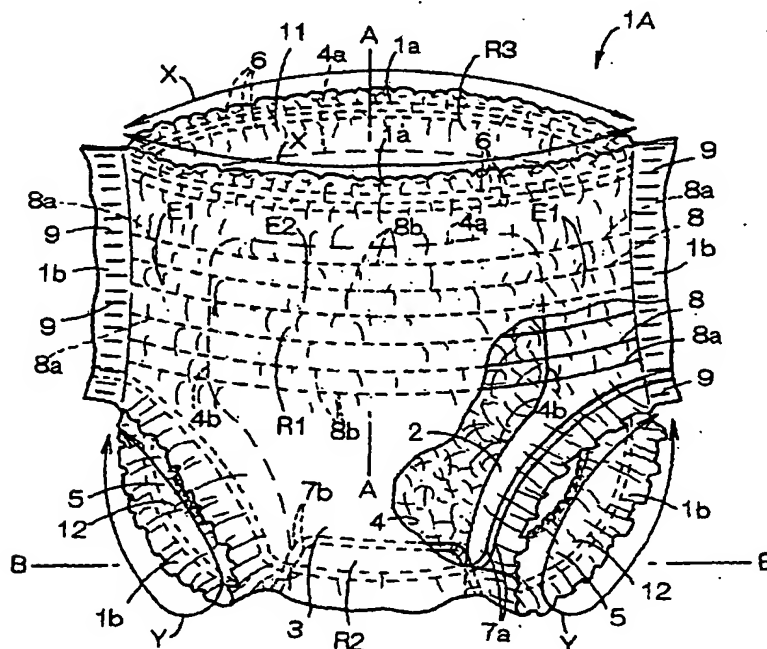

## Description

**[0001]** This invention relates to a disposable pull-on undergarment which absorbs and retains excrements.

**[0002]** Japanese Patent Application Publication No. 1995-236650A discloses a disposable pull-on diaper which comprises a liquid pervious top sheet, a liquid impervious back sheet and an liquid absorbent core interposed between those two sheets, with respective longitudinal side edges of front and rear waist-encircling regions being secured to each other to provide a waist-encircling opening and a pair of leg-encircling openings. In the front waist-encircling region, a plurality of waist elastic members are secured in an extended condition to an edge portion of the waist-encircling opening to extend in a waist-encircling direction. In an edge portion of each leg-encircling opening, a plurality of leg elastic members are secured in an extended condition to extend in a leg-encircling direction. Also, a plurality of auxiliary elastic members are secured in a location intermediate between the waist elastic members and the leg-encircling opening edge portions to extend in the waist-encircling direction between the longitudinal side edges of the front and rear waist regions.

**[0003]** Each auxiliary elastic member has an extensible portion and a non-extensible portion. The extensible portion extends from longitudinal side edges of the core positioned over the front and rear waist-encircling regions toward respective longitudinal side edges of the front waist-encircling region. The non-extensible portion traverses the core to extend between opposite longitudinal side edges of the core. The extensible portions of the auxiliary elastic members act to squeeze a wearer's waist so that the diaper while in use is prevented from sliding down from its position. In the non-extensible portions of the auxiliary elastic members, the diaper is not subjected to an extension stress from the auxiliary elastic members which may otherwise cause the core to contract, so that the core is prevented from puckering.

**[0004]** The diaper disclosed in the above-identified reference relies solely on the extensible portions of auxiliary elastic members to prevent its downward slide and accordingly needs to increase an extension stress of the auxiliary elastic members in their extensible portions. Such a diaper thus squeezes a wearer's waist in a severe manner and provides discomfort to a wearer of the diaper. The non-extensible portions of auxiliary elastic members do not act to press the core against a wearer's skin. This increases a tendency of the core to be spaced away from the wearer's skin during the use of the diaper, and accordingly hinders an excrement-absorbing function of the core.

**[0005]** It is an object of this invention to provide a disposable pull-on undergarment which can reduce an incidence of local exertion of an intense pressure on a waist of a wearer of the garment and can avoid an incidence whereby an excrement-absorbing function of the core is hindered.

**[0006]** According to the present invention, there is provided a disposable pull-on undergarment which comprises a liquid pervious top sheet, a liquid impervious back sheet and an liquid absorbent core interposed between the top and back sheets and includes front and rear waist-encircling regions opposed to each other, a crotch region positioned between the front and rear waist-encircling regions, and a waist-encircling opening and a pair of leg-encircling openings defined by joining respective longitudinal sides edges of the front and rear waist-encircling regions, with at least one of the front and rear waist-encircling regions being rendered elastically contractible in a waist-encircling direction.

**[0007]** The disposable pull-on undergarment further comprises each of the front and rear waist-encircling regions has a first elasticized zone which extends in the waist-encircling direction from opposite longitudinal side edges of the region to the vicinities of opposite side edges of the core, and a second elasticized zone which traverses the core to extend in the waist-encircling direction between the vicinities of opposite side edges of the core, and tensile stress of the first elasticized zone being greater than that of the second elasticized zone.

**[0008]** In accordance with one exemplary embodiment of the present invention, the waist elastic members extending in the waist-encircling direction are attached in an extended condition to an edge portion of the waist-encircling opening. A plurality of auxiliary elastic members spaced longitudinally apart from each other by a specific distance and extending in the waist-encircling direction in the first and second elasticized zones are attached in an extended condition to a location between the waist elastic members and the edge portions of the leg-encircling openings. The extension stress of the auxiliary elastic members is greater in the first elasticized zone than in the second elasticized zone.

**[0009]** In accordance with another exemplary embodiment of the present invention, the waist elastic members extending in the waist-encircling direction are attached in an extended condition to an edge portion of the waist-encircling opening. A plurality of first auxiliary elastic members spaced longitudinally from each other by a specific distance and extending in the waist-encircling direction in the first and second elasticized zones are attached in an extended condition to a location intermediate between the waist elastic members and the edge portions of the leg-encircling openings. A plurality of second auxiliary elastic members spaced longitudinally from each other by a specific distance and extending in the waist-encircling direction in the first elasticized zone are attached in an extended condition to a location intermediate between the waist elastic members and the edge portions of the leg-encircling openings. Tensile stress of the first auxiliary elastic members is smaller than or equal to that of the second auxiliary elastic members.

**[0010]** In a further exemplary embodiment of the present invention, the first elasticized zone when ex-

tended to a maximum extent exhibits an extension stress in a range of 0.2 - 2.0 N/25 mm and the second elasticized zone when extended to a maximum extent exhibits an extension stress in a range of 0.1 - 0.6 N/25 mm.

Fig. 1 is a partially cut-away perspective view of a disposable diaper as one exemplary undergarment; Fig. 2 is a partially cut-away plan view of the diaper when the front and rear waist regions are disconnected from each other and developed longitudinally;

Fig. 3 is an end view taken along the line A-A of Figure 1;

Fig. 4 is an end view taken along the line B-B of Figure 1;

Fig. 5 is a partially cut-away perspective view of a disposable diaper as another exemplary undergarment;

Fig. 6 is a partially cut-away plan view of the diaper when the front and rear waist regions are disconnected from each other and developed longitudinally;

Fig. 7 is a view similar to Figure 6 but viewed from a side of the top sheet;

Fig. 8 is an end view taken along the line C-C of Figure 5;

Fig. 9 is an end view taken along the line D-D of Figure 5; and

Fig. 10 is an end view taken along the line E-E of Figure 5.

[0011] A disposable pull-on undergarment in accordance with the present invention is below described in detail with reference to the attached drawings as it is used in a disposable pull-on diaper.

[0012] Figure 1 is a partially cut-away perspective view of a disposable diaper 1A. Figure 2 is a partially cut-away plan view of the diaper 1A when its front and rear waist-encircling regions R1, R3 are disconnected from each other and developed in a longitudinal direction. In Figure 1, a waist-encircling direction is shown by the arrow X and a leg-encircling direction is shown by the arrow Y. In Figure 2, the diaper 1A is viewed from a side of its back sheet 3. A lateral direction and a longitudinal direction are shown by the arrows X and Y, respectively. An inside surface of the top or back sheet 2, 3 means its surface positioned to face toward a core 4. An outside surface of the top or back sheet 2, 3 means its surface positioned away from the core 4.

[0013] The diaper 1A primarily comprises a liquid-permeable top sheet 2, a liquid-impermeable back sheet 3, a liquid-absorbing core 4 interposed between the top and back sheets 2, 3 and enveloped entirely by and joined to a liquid-diffusion sheet such as tissue paper (not shown), and a substantially liquid-impermeable, leakage-resistant cuff 5. The core 4 is joined via the liquid-diffusion sheet to inside surfaces of the top and back sheets

2 and 3.

[0014] The diaper 1A includes front and rear waist-encircling regions R1 and R3 opposed to each other, and a crotch region R2 positioned intermediate between the front and rear waist-encircling regions R1, R3. A waist-encircling opening 11 and a pair of leg-encircling openings 12 are defined in the diaper 1A.

[0015] As shown in Figure 2, the diaper 1A has laterally-extending end edges 1a and longitudinally-extending side edges 1b. The side edges 1b in the crotch region R2 each describes a curve toward a laterally inward direction of the diaper 1A.

[0016] A plurality of laterally-extending waist elastic members 6 are secured in an extended condition along each end edge 1a. In the crotch region R2, a plurality of leg elastic members 7 are secured in an extended condition along each side edge 1b. In each of the front and rear waist-encircling regions R1 and R3, a plurality of auxiliary elastic members 8 extending laterally and spaced longitudinally apart from each other by a specific distance are secured in an extended condition in a location intermediate between the waist and leg elastic members 6 and 7.

[0017] The diaper 1A is formed into a pull-on type by bringing opposite side edge 1b located respectively in the front and rear waist-encircling regions R1 and R3 into flat contact with each other and securing them to each other at plural joints 9 arranged in an intermittent manner along the longitudinal direction.

[0018] In the diaper 1A, the end edges 1a define an edge portion 1a of the waist-encircling opening 11, and the side edges 1b define respective edge portions 1b of the leg-encircling openings 12 in the crotch region R2, as shown in Figure 1. The waist elastic members 6 extend in the waist-encircling direction in the edge portion 1a of the waist-encircling opening 11. The leg elastic members 7 extend in the leg-encircling direction along the edge portion 1b of each leg-encircling opening 11. The auxiliary elastic members 8 extend in the waist-encircling direction in an area located intermediate between the waist elastic members 6 and the leg-encircling opening edge 1b.

[0019] The front and rear waist-encircling regions R1, R3 of the diaper 1A each has a first elasticized zone E1 and a second elasticized zone E2. In each of the front and rear waist-encircling regions R1 and R3, the first elasticized zone E1 extends in the waist-encircling direction from opposite side edges 1b to the vicinities of opposite side edges 4b of the core 4. The second elasticized zone E2 traverses the core to extend in the waist-encircling direction between the vicinities of opposite side edges 4b of the core 4. The auxiliary elastic members 8 exhibit a higher extension stress in their portions 8a that extend in the first elasticized zone E1 than in their portions 8b that extend in the second elasticized zone E2. Hence, in the diaper 1A, the first elasticized zone E1 is related to the second elasticized zone E2 by extension stress as first elasticized zone E1 > second

elasticized zone E2.

[0020] In the diaper 1A, the first elasticized zone E1 when extended to a maximum extent exhibits an extension stress in the range of 0.2 - 2.0 N/25 mm, preferably in the range of 0.4 - 1.0 N/25 mm. The second elasticized zone E2 when extended to a maximum extent exhibits an extension stress in the range of 0.1 - 0.6 N/25 mm.

[0021] The following procedure is utilized to measure extension stress for the first and second elasticized zones E1 and E2. (1) First, the first elasticized zone E1 is partially cut out to provide a first test piece and the second elasticized zone E2 is partially cut out to provide a second test piece. The first test piece includes portions 8a of the auxiliary elastic members 8, and has a dimension of 100 mm in the waist-encircling direction and a dimension of 25 mm in the longitudinal direction. The second test piece includes portions 8b of the auxiliary elastic members 8 (excluding the core 4), and has a dimension of 100 mm in the waist-encircling direction and a dimension of 25 mm in the longitudinal direction. (2) Then, the extension stress of each test piece is measured using a tensile tester. In the measurement of extension stress, each test piece once allowed to contract by relief from tension is again extended by the tensile tester to a size of 100 mm. The extension stress is a value measured when each test piece is extended to a maximum size of 100 mm.

[0022] In the diaper 1A, the first elasticized zone E1 exhibits a higher extension stress than the second elasticized zone E2. Accordingly, when the diaper is worn, the first elasticized zone E1 squeezes a wearer's waist more tightly than the second elasticized zone E2. However, in accordance with the diaper 1A, the first elasticized zone E1 is not the only one that acts on the wearer but acts in concert with the second elasticized zone E2 to squeeze the wearer's waist in such a way as to prevent the diaper 1A from sliding down from its position. Thus, the extension stress of the first elasticized zone E1 in this diaper is not required to be increased to the level required for the prior art diaper construction and can be maintained within the above-specified range.

[0023] In the second elasticized zone E2 in the diaper 1A, the portions 8b of the auxiliary elastic members 8 press the core 4 against the wearer's skin by their extension stress so that the core 4 of the diaper 1A while in use is prevented from being spaced apart from the wearer's skin. As a result, the occasion where the excrement-absorbing function of the core 4 is hindered can be avoided. Since the extension stress of the second elasticized zone E2 in the diaper 1A is maintained within the above-specified range, the core 4, because of its rigidity, withstands the force exerted by the second elasticized zone E2 when contracted and is thus prevented from puckering.

[0024] If the extension stress of the first elasticized zone E1 is below 0.2 N/25 mm, the compression of the first elasticized zone E1 around the wearer's waist be-

comes weak to result in the increased tendency of the diaper 1A to slide down from its position. If the extension stress of the first elasticized zone E1 exceeds 2.0 N/25 mm, the compression of the first elasticized zone E1 around the wearer's waist becomes excessively strong. The resulting intense pressure on the wearer's waist provides discomfort to the wearer of the diaper 1A. If the extension stress of the second elasticized zone E2 is below 0.1 N/25 mm, it may fail to press the core 4 against the wearer's skin to result in some occasions where the core 4 is spaced apart from the wearer's skin. If the extension stress of the second elasticized zone E2 exceeds 0.6 N/25 mm, the core 4 may be caused to pucker when the second elasticized zone E2 contracts to result in some occasions where the core 4 is spaced apart from the wearer's skin.

[0025] The leakage-resistant cuff 5 extends longitudinally along each side edge 1b of the diaper 1A. Each cuff 5 has a fixed edge 5a that extends longitudinally adjacent the side edge 4b of the core 4, a free edge 5b that is associated with the fixed edge 5a and biased to be spaced apart from the top sheet 2, fixed ends 5c each folded laterally inwardly to overlie the top sheet 2, and side portion 5d (refer to Figure 4) that extends from the fixed side edge 5a toward the side edge 1b of the diaper 1A. An elastic member 10 is attached in an extended condition to the free edge 5b. The elastic member 10 is enclosed in a sleeve portion defined in the free edge 5b.

[0026] The leg-encircling elastic members 7 include a first leg elastic member 7a and a second leg elastic member 7b. These leg elastic members 7a and 7b each includes a central portion 7a<sub>1</sub>, 7b<sub>1</sub> that traverses the crotch region R2 and opposite side portions 7a<sub>2</sub>, 7b<sub>2</sub> that extend along the respective side edges 1b of the diaper. Each side portion 7a<sub>2</sub> of the first leg elastic member 7a is located in about a front half of the side edge 1b portion that extends in the crotch region R2. Each side portion 7b<sub>2</sub> of the second leg elastic member 7b is located in about a rear half of the side edge 1b portion that extends in the crotch region R2.

[0027] Figures 3 and 4 are end views taken along the line A-A and the line B-B, respectively. In each side edge 1a of the diaper 1A, an end 2a of the top sheet 2 and an end 3a of the backsheet 3 extend together outwardly from the side edge 4a of the core 4 where inward surfaces of those ends 2a, 3a are joined to each other, as shown in Figure 3. The waist elastic members 6 and the portions 8a of the auxiliary elastic members 8 are interposed between the top sheet 2 and the back sheet 3 and joined to their respective inward surfaces by means of adhesives (not shown). The portions 8b of the auxiliary elastic members 8 are interposed between the backsheet 3 and the core 4 and joined to the inward surface of the back sheet 3 by means of adhesives (not shown).

[0028] In each side edge portions 1b of the diaper 1A, the side portion 2b of the top sheet 2 is positioned between a side portion 3b of the back sheet 3 and a side

portion 5d of the cuff 5 and secured to those portions 3b, 5d, as shown in Figure 4. The side portions 3b, 5d are secured to each other where they overlap. When the elastic member 10 contracts, the free edge 5b of the cuff 5 is caused to stand up away from the top sheet 2 to form a barrier against excrements. The leg elastic members 7 are positioned between the side portion 3b of the back sheet 3 and the side portion 5d of the cuff 5 and secured to those side portions 3b, 5d by means of adhesives (not shown).

[0029] Figure 5 is a partially cut-away perspective view of a diaper 1B in accordance with another exemplary embodiment. Figure 6 is a partially cut-away plan view of the diaper 1B when its front and rear waist-encircling regions R1, R3 are disconnected from each other and developed in a longitudinal direction. Figure 7 is similar to Figure 6 but viewed from a side of the top sheet 2. In Figure 5, a waist-encircling direction and a leg-encircling direction are indicated by the arrows X and Y, respectively. In Figures 6 and 7, a lateral direction and a longitudinal direction are indicated by the arrows X and Y, respectively.

[0030] The diaper 1B shown in Figure 5 differs from the diaper shown in Figure 1 in the following respects. In the diaper 1B, a liquid impervious back sheet 3 is first formed into a pull-up type, and a liquid-absorbing core 4 covered with a liquid pervious top sheet 2 and a waterproof film 13 is secured to an inward surface of the back sheet 3. The core 4 is enclosed entirely by and joined to a tissue paper (not shown). The core 4 is joined via the tissue paper to the inside surfaces of the top sheet 2 and the waterproof film 13.

[0031] As shown in Figure 6, the diaper 1B has opposite end edges 1a and opposite side edges 1b. The side edges 1b in the crotch region R2 each describes a curve toward a laterally inward direction of the diaper 1B. In each of the front and rear waist-encircling regions R1 and R3, a plurality of the auxiliary elastic members 8 extending laterally and spaced longitudinally apart from each other by a specific distance are secured in an extended condition in a location intermediate between the waist elastic members 6 and the leg elastic members 7A or 7B. The auxiliary elastic members 8 include a plurality of first auxiliary elastic members 8c and a plurality of second auxiliary elastic members 8d.

[0032] As shown in Figure 5, the first auxiliary elastic members 8c are spaced longitudinally from each other by a specific distance and extend in a waist-encircling direction in a first elasticized zone E1 and a second elasticized zone E2. The second auxiliary elastic members 8d are spaced longitudinally apart from each other by a specific distance and extend in a waist-encircling direction in the first elasticized zone E1. The first and second auxiliary elastic members 8c and 8d are related to each other by extension stress as first auxiliary elastic member 8c  $\leq$  second auxiliary elastic member 8d.

[0033] In the diaper 1B, even in the case where the extension stress of the first auxiliary elastic member 8c

is comparable to that of the second auxiliary elastic member 8d, the first elasticized zone E1 in which the first and second auxiliary elastic members 8c, 8d extend shows a higher extension stress compared to the second elasticized zone E2 in which only the first auxiliary elastic members 8c extend. Hence, in the diaper 1B, the first and second elasticized zones E1 and E2 are related to each other by extension stress as first elasticized zone E1  $>$  second elasticized zone E2.

[0034] In the diaper 1B, the first elasticized zone E1 when extended to a maximum extent exhibits an extension stress in the range of 0.2 - 2.0 N/25 mm, preferably in the range of 0.4 - 1.0 N/25 mm, and the second elasticized zone E2 when extended to a maximum extent exhibits an extension stress in the range of 0.1 - 0.6 N/25 mm. The extension stress of the first auxiliary elastic member may be adjusted higher in the elasticized zone E1 than in the second elasticized zone E2.

[0035] The extension stresses of those elasticized zones E1 and E2 are measured according to the same procedure as applied to the diaper 1A shown in Figure 1. In the measurement, the first test piece includes the first auxiliary elastic members 8c and the second test piece further includes the second auxiliary elastic members 8d (excluding the core 4).

[0036] The diaper 1B when worn squeezes a wearer's waist more tightly in the first elasticized zone E1 than in the second elasticized zone E2. However, the first and second elasticized zones E1 and E2 act in concert with each other to hold the diaper 1B around the wearer's waist and prevent the diaper 1B from sliding down from its position. This permits the extension stress of the first elasticized zone E1 to remain within the above-specified range.

[0037] In the second elasticized zone E2 of the diaper 1B, the core 4 is pressed against the wearer's skin by the extension stress of the first auxiliary elastic members 8c so that its excrement-absorbing function is not hindered. Since the extension stress of the second elasticized zone E2 in the diaper 1B is maintained within the above-specified range, the core 4, because of its rigidity, withstands the force exerted by the second elasticized zone E2 when contracted and is thus prevented from puckering.

[0038] Figures 8 and 9 are end views taken along the line C-C and the line D-D of Figure 5, respectively. Figure 10 is an end view taken along the line E-E of Figure 5. A back sheet 3 comprises two superimposed hydrophobic non-woven fabrics 3c and 3d, with those non-woven fabrics 3c, 3d being joined to each other at their opposing surfaces in an intermittent manner. The back sheet 3 may comprise a composite sheet made by laminating a hydrophobic non-woven fabric and a plastic film.

[0039] Waist elastic members 6, first and second leg elastic members 7a and 7b, and first and second auxiliary elastic members 8c and 8d are all positioned between the non-woven fabrics 3c and 3d together constituting the back sheet 3 and secured to those non-woven

fabrics 3c, 3d by adhesives (not shown).

[0040] In the diaper 1B, a side portion 2b of the top sheet 2 and a side portion 13b of a waterproof film 13 extend outwardly from each side edge 4b of the core 4, as shown in Figure 10. The film side portion 13b is folded upwardly from each side edge 4b of the core 4 to overlie an outside surface of the top sheet 2. The fixed edge 5a of the leakage-resistant cuff 5 is located between and secured to the side portions 2b and 13b. The fixed ends 5c of the cuff 5 are both secured to the outside surface of the top sheet 2. The free edge 5b of the cuff 5 is caused to stand up away from the top sheet 2 by contraction of the elastic member 10.

[0041] Non-woven fabrics of hydrophilic fibers and porous plastic films can be used for the top sheet 2. Non-woven fabrics of hydrophilic fibers, liquid impervious plastic films and laminate sheets comprised of a hydrophilic non-woven fabric and a liquid impervious plastic film can be used for the back sheet 3 of the diaper 1A shown in Figure 1. Non-woven fabrics of hydrophilic fibers can be used for the leakage-resistance cuff 5. Flexible plastic films can be used for the waterproof film 13.

[0042] A composite non-woven fabric made by interposing a highly water-resistant melt-blown non-woven fabric between high-strength and high-flexibility spunbonded non-woven fabrics can also be used for the back sheet 3, 3c, 3d and the cuff 5 of the shown diaper embodiment 1A, 1B.

[0043] Useful non-woven fabrics can be manufactured by various techniques including spun-lacing, needle punching, melt blown, thermal bonding, spun-bonding, chemical bonding, air-through and other processes. Examples of useful fibers constituting such non-woven fabrics include fibers such as of polyolefin, polyester and polyamide, sheath-core and side-by-side conjugate fibers such as of polyethylene/polypropylene or polyester.

[0044] The elastic members 6, 7, 8 and 10 comprise an elastomer such as of a natural or synthetic rubber. In the shown diapers 1A, 1B, elastic strands are used for the elastic members 6, 7, 8 and 10. However, elastic bands are also useful for the elastic members 6, 7, 8 and 10.

[0045] In the shown diaper embodiments 1A and 1B, the elastic members 6, 7, 8 and 10 may be secured, either in an intermittent or continuous manner, to the top and back sheets 2, 3, 3c, 3d and the cuff 5 by means of adhesives. Also in the shown diaper embodiments 1A and 1B, the waist elastic members 6 and the auxiliary elastic members 8 may be attached to at least one of the front and rear waist-encircling regions R1 and R3.

[0046] The core 4 comprises a mixture of fluff pulps, high-absorbent polymer particles and thermoplastic synthetic fibers and is provided in the form of being compressed to a specific thickness. Accordingly, the core 4 exhibits higher rigidity compared to the top and back sheets 2, 3, 3c, 3d and the cuff 5. Examples of useful high-absorbent polymers include starch-, cellulose- and

synthetic polymer-based polymers.

[0047] Hot-melt adhesives or welding means such as sonic sealing or heat sealing can be utilized to secure the top sheet 2 to the back sheet 3, 3c, 3d, secure the leakage-resistant cuff 5 and waterproof film 13, and join the core 4.

[0048] The disposable pull-up undergarment in accordance with the present invention, when worn by a wearer, squeezes the wearer's waist by the extension stress of the first and second elasticized zones so that the undergarment while being worn can be prevented from sliding down from its position. The following relationship exists in the undergarment; first elasticized zone > second elasticized zone, in terms of extension stress. Accordingly, the undergarment when worn squeeze a wearer's waist more tightly in the first elasticized zone than in the second elasticized zone. However, the first and second elasticized zones act in concert with each other to hold the undergarment around the wearer's waist. Hence, the extension stress of the first elasticized zone in this undergarment is not required to be increased to the level required for the prior art garment construction. As a result, the occasion can be avoided where the first elasticized zone exerts a strong pressure on the wearer's waist.

[0049] In accordance with the undergarment, the core is pressed against the wearer's skin by the extension stress of the second elasticized zone so that it is prevented from being spaced apart from the wearer's skin. As a result, the occasion whereby the excrement-absorbing function of the core is hindered can be avoided. Also in accordance with the undergarment, the core, because of its rigidity, withstands the force exerted by the second elasticized zone when it contracts and is thus prevented from puckering. As a result, the occasion whereby the core is spaced apart from the wearer's skin can be avoided.

## Claims

1. A disposable pull-on undergarment which comprises a liquid pervious top sheet, a liquid impervious back sheet and an liquid absorbent core interposed between the top and back sheets and includes front and rear waist-encircling regions opposed to each other, a crotch region positioned between the front and rear waist-encircling regions, and a waist-encircling opening and a pair of leg-encircling openings defined by joining respective longitudinal sides edges of the front and rear waist-encircling regions, with at least one of the front and rear waist-encircling regions being rendered elastically contractible in a waist-encircling direction;

said undergarment which further comprises the front and rear waist-encircling regions each having a first elasticized zone which extends in the waist-encircling direction from opposite longitudinal

side edges of the region toward the vicinities of opposite side edges of the core, and a second elasticized zone which traverses the core to extend in the waist-encircling direction between the vicinities of opposite side edges of the core; and tensile stress of the first elasticized zone being greater than that of the second elasticized zone. 5

2. The disposable pull-on undergarment of Claim 1 wherein said waist elastic members extending in the waist-encircling direction are attached in an extended condition to an edge portion of the waist-encircling opening, a plurality of auxiliary elastic members spaced longitudinally apart from each other by a specific distance and extending in the waist-encircling direction in the first and second elasticized zones are attached in an extended condition to a location between the waist elastic members and the edge portions of the leg-encircling openings, and the tensile stress of the auxiliary elastic members is greater in the first elasticized zone than in the second elasticized zone. 10 15 20
3. The disposable pull-on undergarment of Claim 1 wherein said waist elastic members extending in the waist-encircling direction are attached in an extended condition to an edge portion of the waist-encircling opening, a plurality of first auxiliary elastic members spaced longitudinally apart from each other by a specific distance and extending in the waist-encircling direction in the first and second elasticized zones are attached in an extended condition to a location intermediate between the waist elastic members and the edge portions of the leg-encircling openings, a plurality of second auxiliary elastic members spaced longitudinally apart from each other by a specific distance and extending in the waist-encircling direction in the first elasticized zone are attached in an extended condition to a location intermediate between the waist elastic members and the edge portions of the leg-encircling openings, and tensile stress of the first auxiliary elastic members is smaller than or equal to that of the second auxiliary elastic members. 25 30 35 40 45
4. The disposable pull-on undergarment of Claim 1 wherein said first elasticized zone when extended to a maximum extent exhibits an extension stress in a range of 0.2 - 2.0 N/25 mm and said second elasticized zone when extended to a maximum extent exhibits an extension stress in a range of 0.1 - 0.6 N/25 mm. 50

55

FIG.1

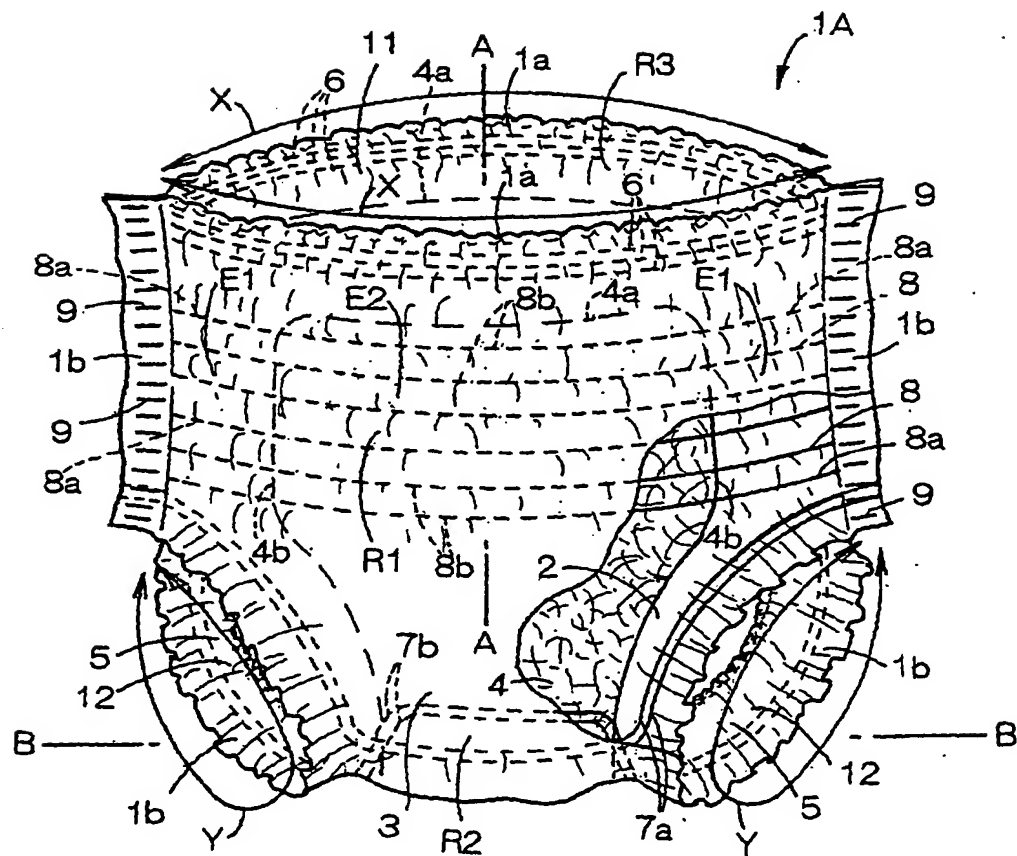




FIG.2

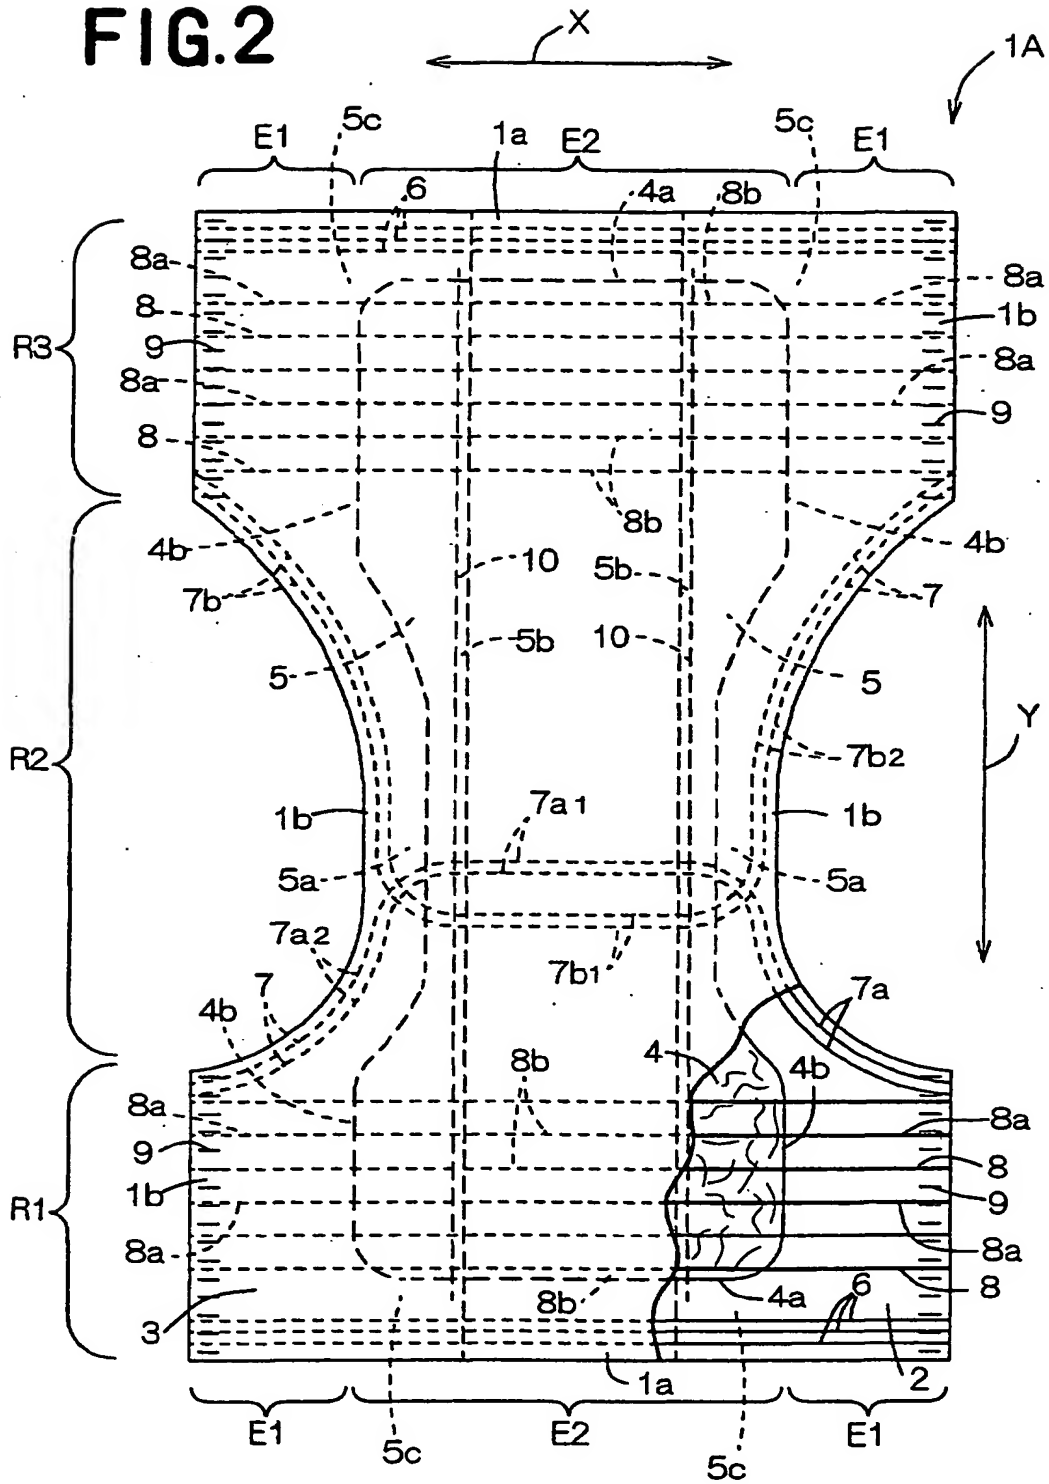


FIG.3



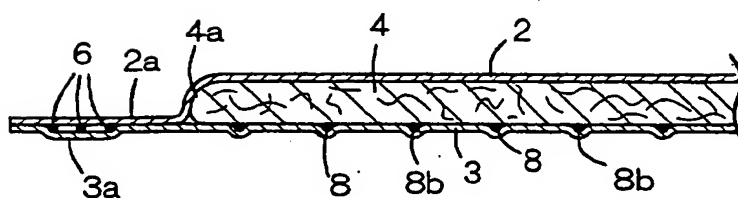



FIG.4

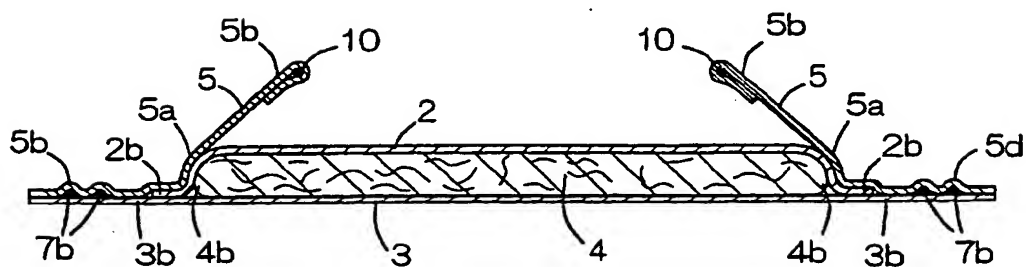

**FIG. 5**

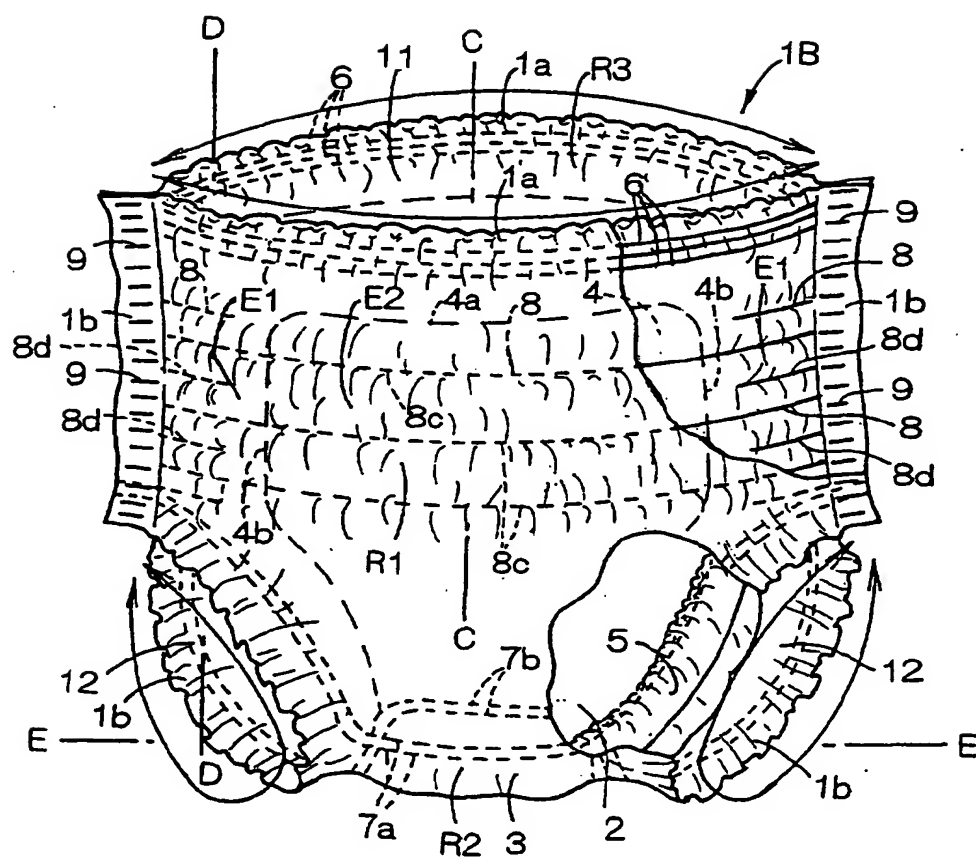

**FIG. 6**

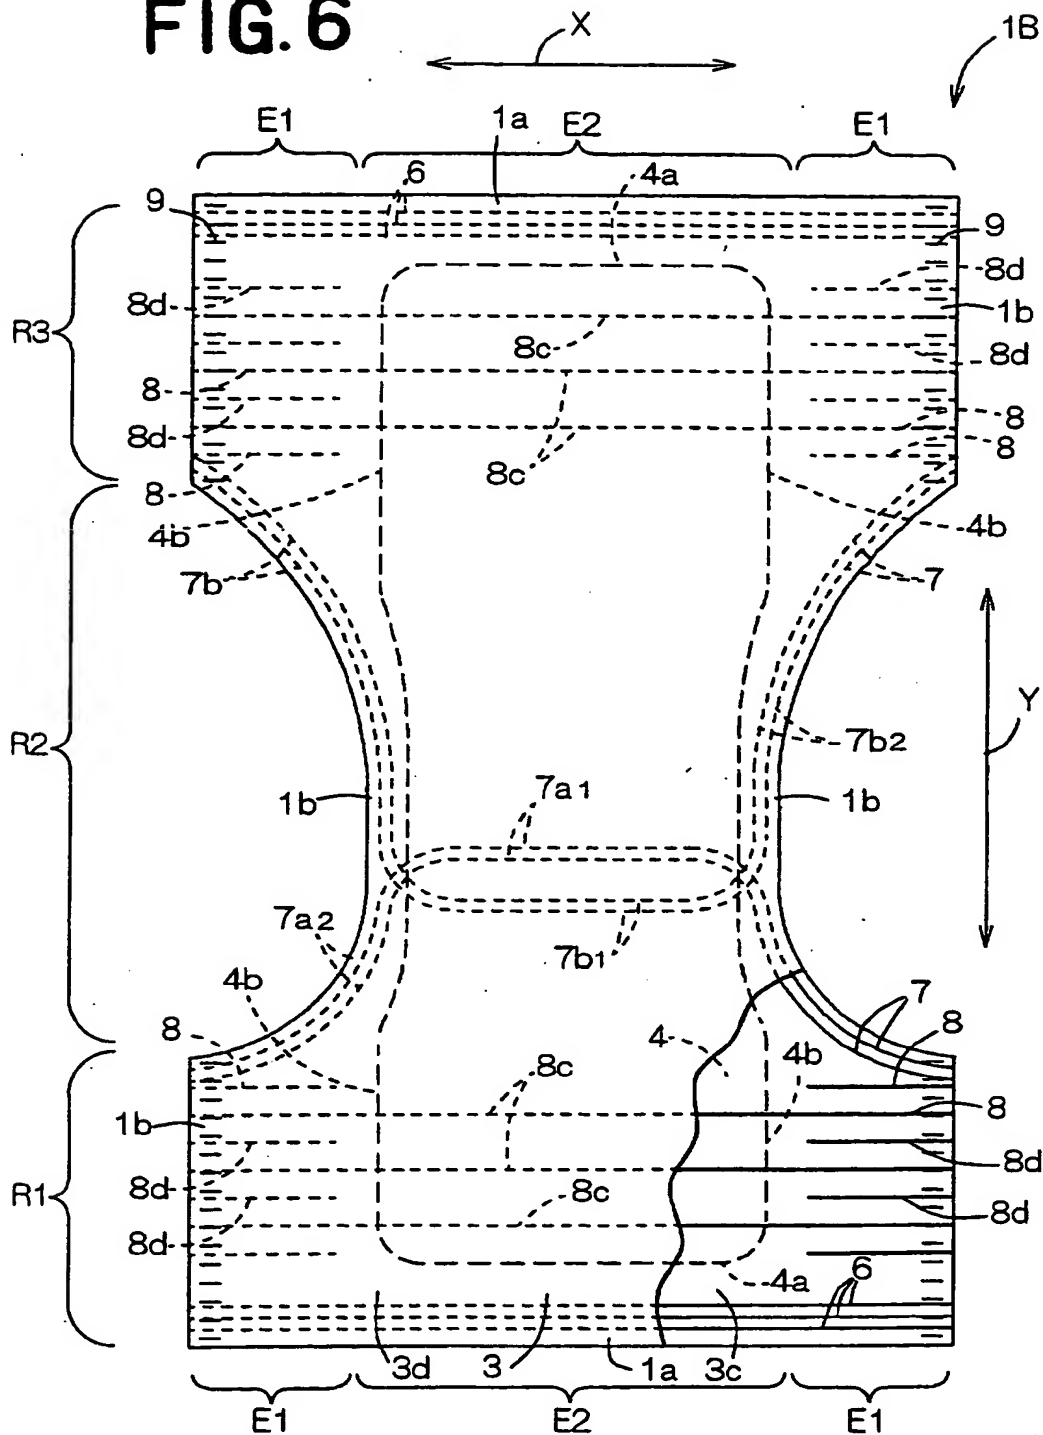

**FIG.7**

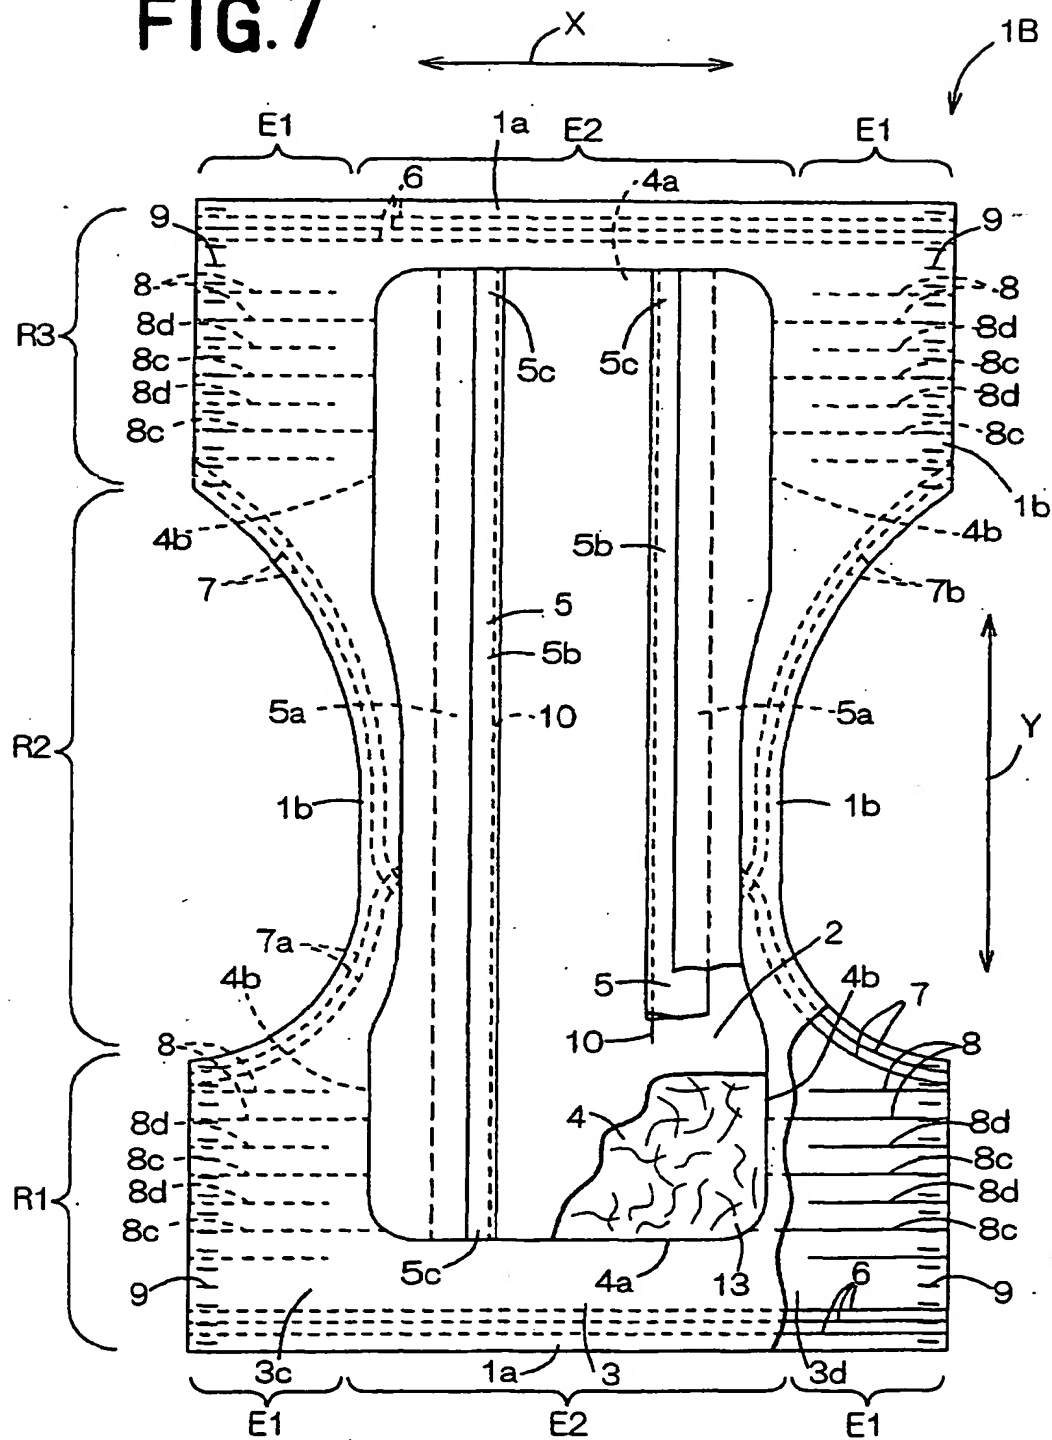


FIG.8

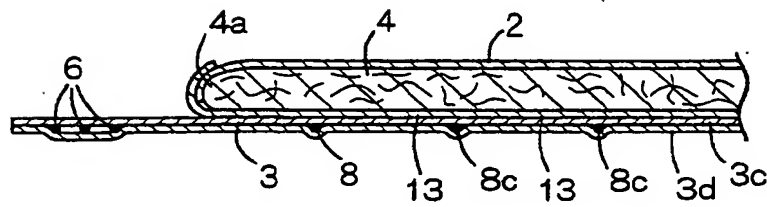


FIG.9


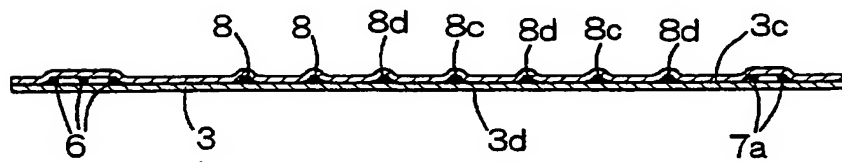


FIG.10



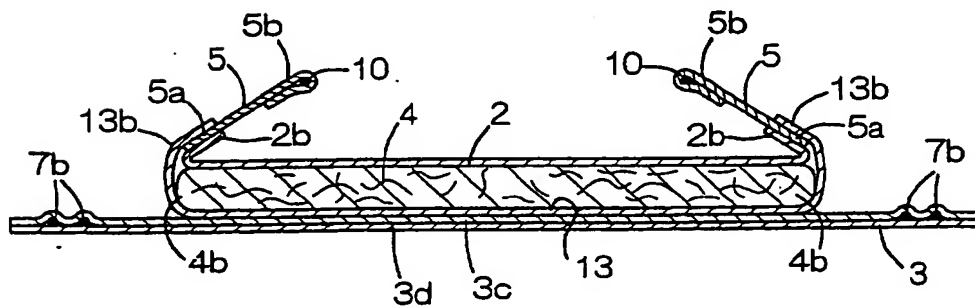

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 8772

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 01, 31 January 1996 (1996-01-31) & JP 07 236650 A (TOYO EIZAI KK), 12 September 1995 (1995-09-12) * abstract *	1-3	A61F13/15
A	EP 0 761 194 A (UNI CHARM CORP) 12 March 1997 (1997-03-12) * column 3, line 16 - line 30; figure 3 *	1-3	
A	GB 2 266 445 A (UNI CHARM CORP) 3 November 1993 (1993-11-03) * abstract; figure 2 *	1-3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61F
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>8 January 2002</b>	Examiner <b>Westermayer, W</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (PatCo1)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 30 8772

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-01-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 07236650	A	12-09-1995	JP 2602408 B2	23-04-1997
EP 0761194	A	12-03-1997	JP 3130453 B2	31-01-2001
			JP 9056746 A	04-03-1997
			JP 3130454 B2	31-01-2001
			JP 9056747 A	04-03-1997
			AU 718109 B2	06-04-2000
			AU 6219896 A	27-02-1997
			CA 2184039 A1	26-02-1997
			EP 0761194 A2	12-03-1997
			KR 158548 B1	15-12-1998
			TW 386432 Y	01-04-2000
			KR 158547 B1	15-12-1998
GB 2266445	A	03-11-1993	JP 3186263 A	14-08-1991
			JP 7059243 B	28-06-1995
			AU 641454 B2	23-09-1993
			AU 6812590 A	20-06-1991
			CA 2032388 A1	19-06-1991
			DE 69027592 D1	01-08-1996
			DE 69027592 T2	06-02-1997
			DE 69032509 D1	27-08-1998
			DE 69032509 T2	22-04-1999
			EP 0437771 A2	24-07-1991
			EP 0688551 A2	27-12-1995
			GB 2239783 A , B	17-07-1991
			KR 9601479 Y1	17-02-1996
			US 5334152 A	02-08-1994
			US 5645543 A	08-07-1997
			US 5055103 A	08-10-1991
			US 5197960 A	30-03-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82